
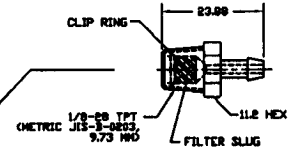


1675-011
Single barb push on w/ nickel plated filter

1675-012
Single barb push on without filter



1675-013
Single barb push on with orifice

1675-185M
Metric single barb push on



1675-182
2 barb push on with filter

1675-183
2 barb push on without filter







1675-126
1/4-20 push on assembly w/ nylon nut & washer

1675-226
1/4-20 push on assembly w/ brass nut and nylon washer

1675-127
1/4-20 push on assembly w/ nylon nut & washer

1675-227
1/4-20 push on assembly w/ brass nut and nylon washer

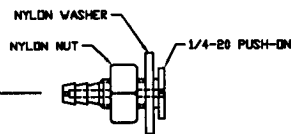






1675-180
2 Barb female push on with filter

1675-191
Single-barb female w/filter & orifice


1675-196
Single-barb female w/filter

1675-197
Single-barb female (1/8-27 NPT)


1675-601
Metric single-barb female (M10 THD.)

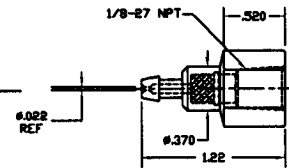


1675-152
Male / female adapter w/ nickel plated filter
(1/8-27 NPT)

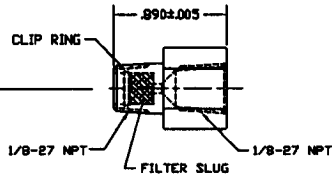


1675-530
Male / female adapter w/ 1/8-27 NPT(f),
3/8-24 THD (w/ o-ring, (w/ filter))

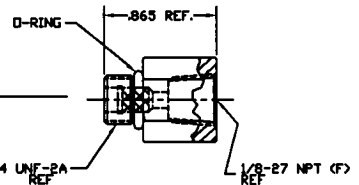


1675-951
Male / female adapter w/ 1/8-27 NPT(f),
3/8-24 THD (w/ hi-temp. o-ring, (w/ filter))

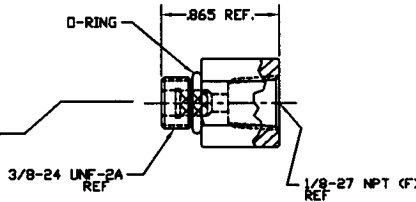


1675-028
Male connector w/ 45 deg. flare

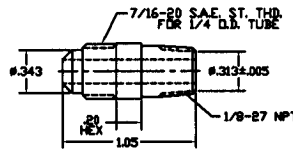


1675-128
Male connector w/ 45 deg. w/ filter

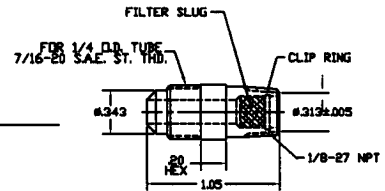


1675-201
Male fitting, 1/8-27 NPT, both ends, w/o filter




1675-202
Male fitting, 1/8-27 NPT, both ends, w/ filter

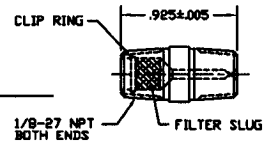


1675-024
Male fitting, 1/8-27 NPT, w/ plastic filter



1675-526
Male fitting, 1/8-27 NPT, 3/8-24 THD (w/ o-ring), (w/ filter)

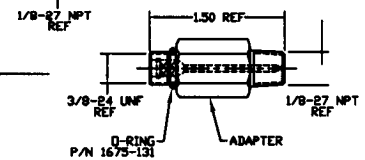


1675-528
Male fitting, 1/8-27 NPT, 3/8-24 THD (w/ o-ring), (w/ filter)


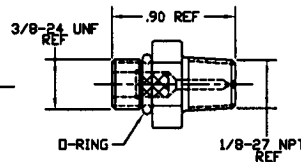


1675-952
Male fitting, 1/8-27 NPT, 3/8-24 THD
(w/ hi-temp. o-ring), (w/ filter)

1675-190
 Assembly, 90 deg. fitting w/o filter

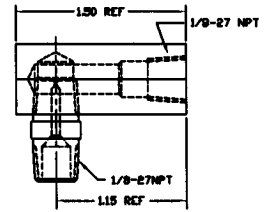

1675-192
 Assembly, 90 deg. fitting w/ filter

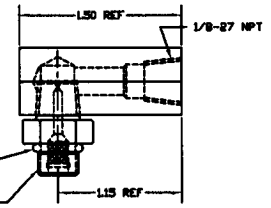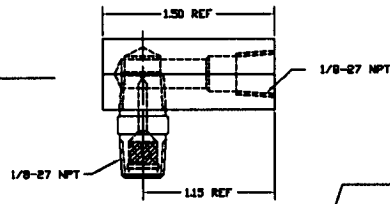


1675-518
 Assembly, 90 deg. fitting w/ filter - straight thread


1675-023
 90 deg. flanged fitting (green)

1675-033
 90 deg. flanged fitting (black)


1675-233
 90 deg. flanged fitting (black) w/ o-ring

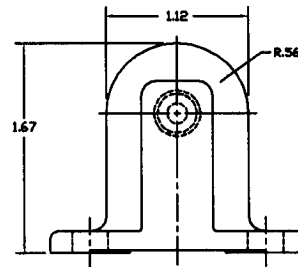


1675-262
 Connector




1675-615
 Banjo fitting




1775-821
 10' coiled EPDM hose
 1775-822
 20' coiled EPDM hose
 1775-823
 3' coiled EPDM hose
 1775-824
 5' coiled EPDM hose
 1775-826
 75" coiled EPDM hose

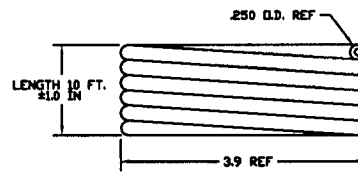


1775-825
 5' coiled EPDM hose & 1675-011 fitting
 1775-860
 10' coiled EPDM hose & 1675-011 fitting
 1781-821
 3' coiled EPDM hose & 1675-011 fitting

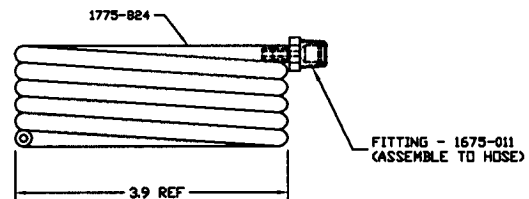


1675-173
 #10-32 Single Barb Hose Fitting
 (USE WITH .109 I.D. TUBING)

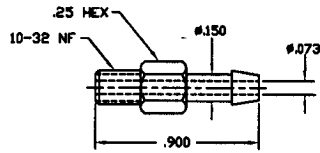


1675-041
 Nylon fitting

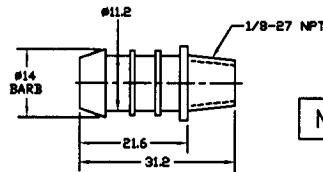


1675-044
 Rubber grommet
 (USE WITH 1 1/16" OR 18mm DIA. MOUNTING HOLE)




1675-047
 Kit, nylon fitting & rubber grommet

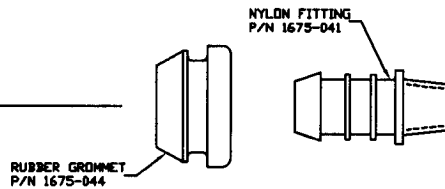

1675-070
 Mini Gauge grommet
 (USE WITH 7/8" DIA. MOUNTING HOLE)



1675-603
 Bracket Remote Mount (black)

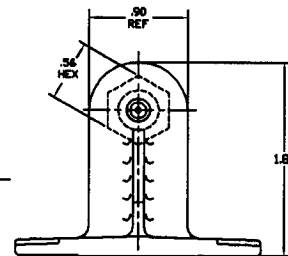

1675-750
 Adapter Assembly

